





Note: The product images shown may change over time as products are updated.

## Dimensions

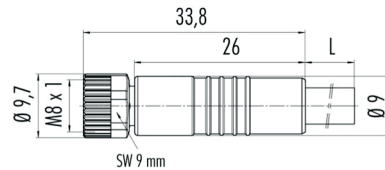

## Connection



1 *brown*  
2 *white*  
3 *blue*  
4 *black*

## Part Number

C-FS4TZ-T665

## Features

- High performance TPE cables for automotive applications
- 10 Million flex rating for long-lasting performance
- Anti-vibration nuts for reliable connection
- Single-ended, double-ended and splitter versions available
- Ideal for use in weld cells where cables can get damaged

## Cable Design

## Technical Data

Connector Type	M8
Cable Type	Single
Connector A	-
Connector B	Female Straight
Length (m)	5 m
Locking System	Screw
Rated Current	4 A
Rated Voltage	250 V
Wire Gauge	4 x 22 AWG
Stranding	19 x 34
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuSn (Bronze)
Contact Plating	Au (Gold)
Jacket Type	TPE-E
Coupling Nut	Die Cast Zinc, Nickel Plated
Protection Class	IP68
Temperature Range	-25 °C to +105 °C

