





Note: The product images shown may change over time as products are updated.

**Dimensions**

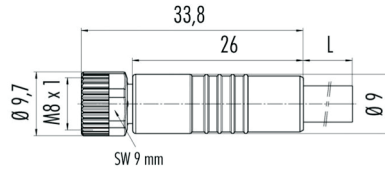

**Connection**



- 1 *brown*
- 2 *white*
- 3 *blue*
- 4 *black*

**Part Number**

**C-FS4TZ-T662**

**Features**

- **High performance TPE cables for automotive applications**
- **10 Million flex rating for long-lasting performance**
- **Anti-vibration nuts for reliable connection**
- **Single-ended, double-ended and splitter versions available**
- **Ideal for use in weld cells where cables can get damaged**

**Cable Design**

**Technical Data**

Connector Type	M8
Cable Type	Single
Connector A	-
Connector B	Female Straight
Length (m)	2 m
Locking System	Screw
Rated Current	4 A
Rated Voltage	250 V
Wire Gauge	4 x 22 AWG
Stranding	19 x 34
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuSn (Bronze)
Contact Plating	Au (Gold)
Jacket Type	TPE-E
Coupling Nut	Die Cast Zinc, Nickel Plated
Protection Class	IP68
Temperature Range	-25 °C to +105 °C



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305  
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127  
 service@htmsensors.com