

- FIXED MOUNT SENSORS FOR EASY MOUNTING
- RELIABLE SENSING DISTANCE
- NOW AVAILABLE IN METALHEAD™ VERSIONS
- AVAILABLE WITH METALBRAID OR PRE-INSTALLED SILICONE TUBING
- AVAILABLE WITH SPATTERGUARD™ COATING FOR WELDING AREAS
- AVAILABLE IN M8 OR M12 CONNECTORS OR PRE-WIRED



METALHEAD™ FLATPACK SENSORS SPECIFICATIONS




Dimensions	20 mm x 32 mm x 8 mm				
Sensing Distance	8 mm				
Operating Voltage	10-30 VDC				
Operating Temperature	-25 °C - +100 °C				
Housing Material	PTFE Coated Brass Housing / PBT Sensing Face		1-Piece Stainless Steel Face and Body	1-Piece PTFE Coated Stainless Steel Face and Body	
Cable Jacket		Factory Pre-Installed High Temperature Silicone Jacket		Cut Resistant Braided Stainless Steel Cable Jacket	Factory Pre-Installed High Temperature Silicone Fiberglass Jacket
PNP - N/O - 0.3 m Pigtail M12	EQM1-2008P-A3U0.3/P12-PTFE-100C	EQM1-2008P-A3U0.3/P12-PTFE-100C-S	EQS1-2008P-A3U0.3/P12-100C	EQS1-2008P-A3U0.3/P12-PTFE-100C-HD	EQS1-2008P-A3U0.3/P12-PTFE-100C-WD
PNP - N/O - 0.7 m Pigtail M12	EQM1-2008P-A3U0.7/P12-PTFE-100C	EQM1-2008P-A3U0.7/P12-PTFE-100C-S	EQS1-2008P-A3U0.7/P12-100C	EQS1-2008P-A3U0.7/P12-PTFE-100C-HD	EQS1-2008P-A3U0.7/P12-PTFE-100C-WD
PNP - N/O - 0.3 m Pigtail M8	EQM1-2008P-A3U0.3/P8-PTFE-100C	EQM1-2008P-A3U0.3/P8-PTFE-100C-S	EQS1-2008P-A3U0.3/P8-100C	EQS1-2008P-A3U0.3/P8-PTFE-100C-HD	EQS1-2008P-A3U0.3/P8-PTFE-100C-WD
PNP - N/O - 0.7 m Pigtail M8	EQM1-2008P-A3U0.7/P8-PTFE-100C	EQM1-2008P-A3U0.7/P8-PTFE-100C-S	EQS1-2008P-A3U0.7/P8-100C	EQS1-2008P-A3U0.7/P8-PTFE-100C-HD	EQS1-2008P-A3U0.7/P8-PTFE-100C-WD
NPN - N/O - 0.3 m Pigtail M12	EQM1-2008N-A3U0.3/P12-PTFE-100C	EQM1-2008N-A3U0.3/P12-PTFE-100C-S	EQS1-2008N-A3U0.3/P12-100C	EQS1-2008N-A3U0.3/P12-PTFE-100C-HD	EQS1-2008N-A3U0.3/P12-PTFE-100C-WD
NPN - N/O - 0.7 m Pigtail M12	EQM1-2008N-A3U0.7/P12-PTFE-100C	EQM1-2008N-A3U0.7/P12-PTFE-100C-S	EQS1-2008N-A3U0.7/P12-100C	EQS1-2008N-A3U0.7/P12-PTFE-100C-HD	EQS1-2008N-A3U0.7/P12-PTFE-100C-WD
NPN - N/O - 0.3 m Pigtail M8	EQM1-2008N-A3U0.3/P8-PTFE-100C	EQM1-2008N-A3U0.3/P8-PTFE-100C-S	EQS1-2008N-A3U0.3/P8-100C	EQS1-2008N-A3U0.3/P8-PTFE-100C-HD	EQS1-2008N-A3U0.3/P8-PTFE-100C-WD
NPN - N/O - 0.7 m Pigtail M8	EQM1-2008N-A3U0.7/P8-PTFE-100C	EQM1-2008N-A3U0.7/P8-PTFE-100C-S	EQS1-2008N-A3U0.7/P8-100C	EQS1-2008N-A3U0.7/P8-PTFE-100C-HD	EQS1-2008N-A3U0.7/P8-PTFE-100C-WD

***N/C versions available, change A to B in part #

***Pre-wired versions available, change P8 or P12 to cable length, ie. 2 m, 5 m

***AC and DC 2-wire models may be available

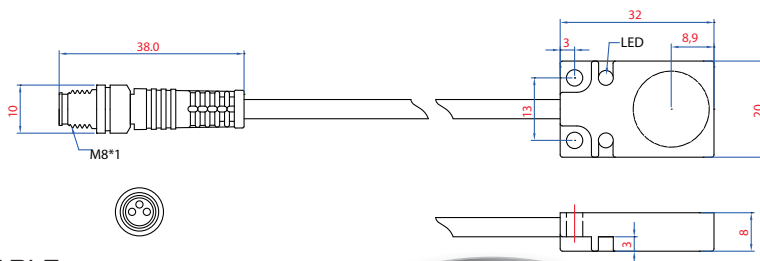


METALHEAD™ FLATPACK SENSORS OFFER A RELIABLE SENSING RANGE WITH EASY MOUNTING AND LONG LASTING PERFORMANCE WITH A STEEL FACE AND DURABLE CABLE OPTIONS.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304
 Toll Free: 1-800-644-1756
 service@htmsensors.com

Proudly Supported by

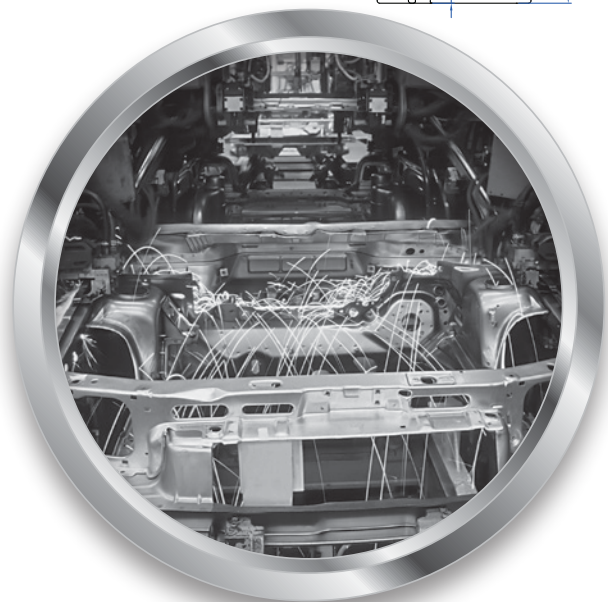

TOLL FREE: 1-800-644-1756