




Note: The product images shown may change over time as products are updated.

## Dimensions

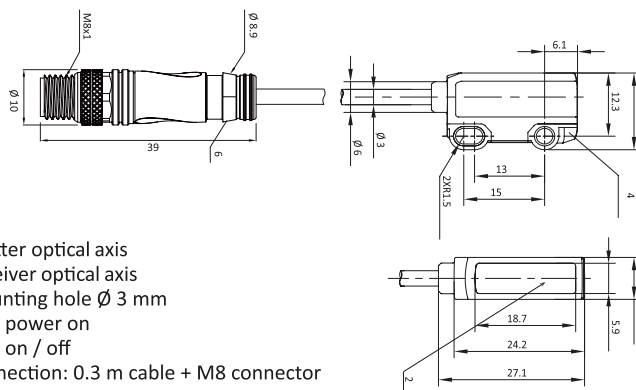

- 1 Emitter optical axis
- 2 Receiver optical axis
- 3 Mounting hole Ø 3 mm
- 4 LED: power on
- 5 LED: on / off
- 6 Connection: 0.3 m cable + M8 connector

## Part Number


**H12-TTX-1000D-M8-3P0.3**

## Features

Photoelectric sensors are used in virtually any manufacturing process with moving parts to detect products, machine parts, and a wide variety of moving objects.

For additional information, contact HTM Sensors at 800-644-1756 or [service@htmsensors.com](mailto:service@htmsensors.com)

## Connection



## Technical Data

|                               |                                               |
|-------------------------------|-----------------------------------------------|
| Sensing Range                 | 1 m                                           |
| Light Source                  | Red LED (630 nm)                              |
| Light Spot Size               | 8 mm @ 200 mm / 20 mm @ 600 mm / 30 @ 1000 mm |
| Indicator LEDs                | Power: Green                                  |
| IO-Link                       | No                                            |
| Supply Voltage                | 10-30 V DC                                    |
| Max. Load Current             | -                                             |
| No Load Current               | <= 18 mA                                      |
| Short Circuit Protection      | Yes                                           |
| Reverse Polarity Protection   | Yes                                           |
| Output Type                   | -                                             |
| Operation Mode                | -                                             |
| Switching Frequency           | -                                             |
| Sensitivity Adjustment        | -                                             |
| Housing Material              | PC+PBT                                        |
| Lens Material                 | PC                                            |
| IP Rating                     | IP67                                          |
| Timer Options                 | -                                             |
| Ambient Operating Temperature | -10 C to +50 C                                |
| Vibration Resistance          | EN 60068-2-6                                  |
| Shock Resistance              | EN 60068-2-27                                 |
| Cable or Connector            | M8 3 Pin 0.3 m Pigtail                        |