




Note: The product images shown may change over time as products are updated.

Diagram

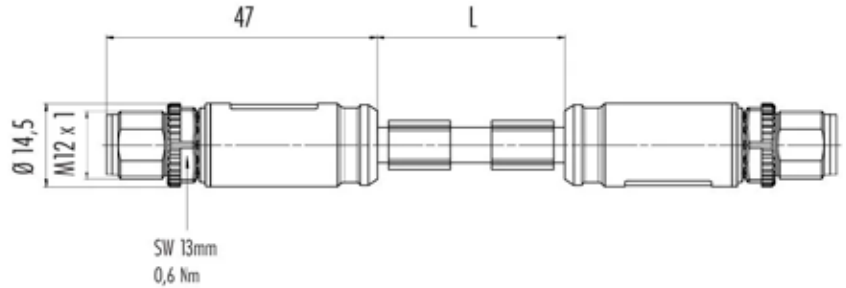

Part Number

XS-MS8TZ-T892 + XS-MS

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

Wiring



Technical Data

Cable Type	Double Ended
Connector A	M12 X-coded Male Straight
Connector B	M12 X-coded Male Straight
Length	2 m
Locking System	Screw
Rated Current	0.5A
Rated Voltage	50 VAC / 60 VDC
Wire Gauge	4x2x26/7AWG
Shielded	Yes to coupling nut
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuZn
Contact Plating	Au
Jacket Type	PUR
Coupling Nut	Zinc Die-cast Nickel-Plated
Protection Class	IP67
Temperature Range	-40 °C to +80 °C
Cable Diameter	6.2 mm
Cable	CAT 6a



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
In Canada: 3419 Mainway, Burlington, ON L7M 1A9
Toll Free: 1-800-644-1756 • Fax: 888-283-2127
service@htmsensors.com