




Diagram

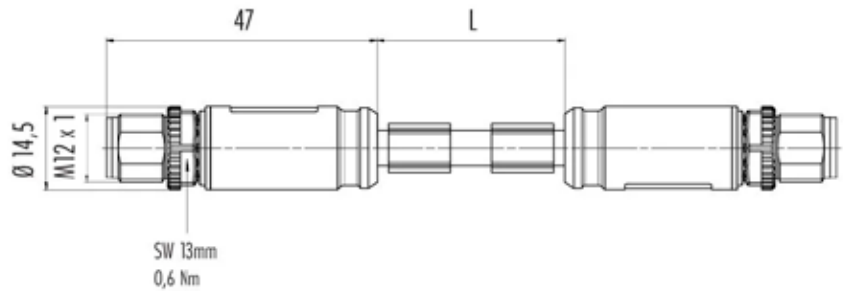

Note: The product images shown may change over time as products are updated.

Part Number

XS-MS8TZ-T895 + XS-MS

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

Wiring



Technical Data

|                   |                             |
|-------------------|-----------------------------|
| Cable Type        | Double Ended                |
| Connector A       | M12 X-coded Male Straight   |
| Connector B       | M12 X-coded Male Straight   |
| Length            | 5 m                         |
| Locking System    | Screw                       |
| Rated Current     | 0.5A                        |
| Rated Voltage     | 50 VAC / 60 VDC             |
| Wire Gauge        | 4x2x26/7AWG                 |
| Shielded          | Yes to coupling nut         |
| Contact Carrier   | PUR                         |
| Molded Body       | PUR                         |
| Contact Material  | CuZn                        |
| Contact Plating   | Au                          |
| Jacket Type       | PUR                         |
| Coupling Nut      | Zinc Die-cast Nickel-Plated |
| Protection Class  | IP67                        |
| Temperature Range | -40 °C to +80 °C            |
| Cable Diameter    | 6.2 mm                      |
| Cable             | CAT 6a                      |



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305  
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127  
 service@htmsensors.com