


ZB-FS5TZ-V5510

Cables and Connectors - Mini Cables



Note: The product images shown may change over time as products are updated.

Dimensions

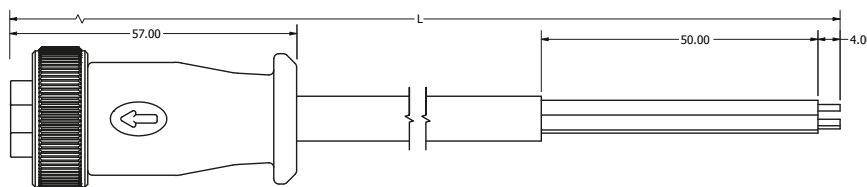

Connection



7/8"-16UN2

1. Black
2. Blue
3. Green/Yellow
4. Brown
5. White

Part Number

ZB-FS5TZ-V5510

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

Technical Data

Cable Type	Single Ended
Connector A	-
Connector B	7/8" Mini Female Straight
Length (m)	10 m
Locking System	Screw
Rated Current	9A
Rated Voltage	600 V AC/DC
Wire Gauge	18 AWG
Shielded	Braided shield not connected to coupling nut
Contact Carrier	TPU
Molded Body	TPU
Contact Material	CuZn
Contact Plating	Au
Jacket Type	PVC
Coupling Nut	Nickel Plated Brass
Protection Class	IP68
Temperature Range	-25 °C to +105 °C
Cable Diameter	9.8 mm



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
In Canada: 3419 Mainway, Burlington, ON L7M 1A9
Toll Free: 1-800-644-1756 • Fax: 888-283-2127
service@htmsensors.com

htmsensors.com