




Note: The product images shown may change over time as products are updated.

**Dimensions**

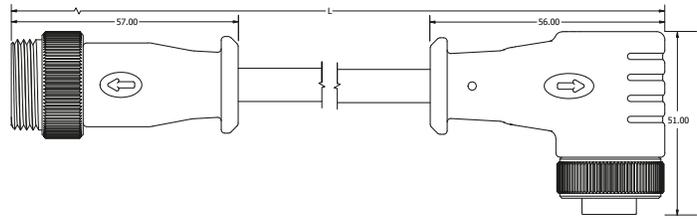

**Connection**



**Part Number**

ZS-MS3TZ-V532+ZS-FA3

**Features**

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

**Technical Data**

Cable Type	Double Ended
Connector A	7/8" Mini Male Straight
Connector B	7/8" Mini Female Angled
Length (m)	2 m
Locking System	Screw
Rated Current	12A
Rated Voltage	600 V AC/DC
Wire Gauge	18 AWG
Shielded	Shield connected to coupling nut
Contact Carrier	TPU
Molded Body	TPU
Contact Material	CuZn
Contact Plating	Au
Jacket Type	PVC
Coupling Nut	Nickel Plated Brass
Protection Class	IP68
Temperature Range	-25 °C to +105 °C
Cable Diameter	8.1 mm

