





Note: The product images shown may change over time as products are updated.

Dimensions

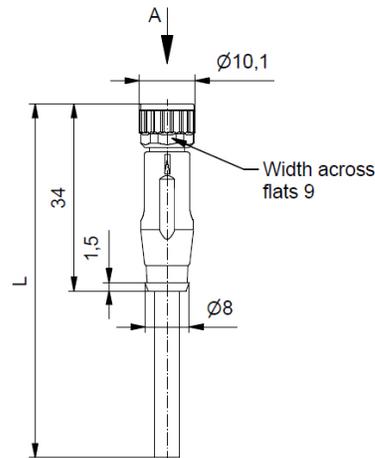

Connection



1 *brown*
3 *blue*
4 *black*

Part Number

C-FS3TZ-P665

Features

- High performance PUR cables for oily environments
- Anti-vibration nuts for reliable connection
- Single-ended, double-ended and splitter versions available
- Ideal for use in CNC machines where cables can get damaged

Technical Data

Connector Type	M8
Cable Type	Single
Connector A	-
Connector B	Female Straight
Length (m)	5 m
Locking System	Screw
Rated Current	3 A
Rated Voltage	60 V
Wire Gauge	3 x 22 AWG
Stranding	19 x 34
Contact Carrier	TPU GF
Molded Body	TPU
Contact Material	CuSn (Bronze)
Contact Plating	Au (Gold)
Jacket Type	PUR
Coupling Nut	GD Zn, Ni
Protection Class	IP67
Temperature Range	-30 °C to + 60 °C

