Cables and Connectors - Solenoid Cables



Note: The product images shown may change over time as products are updated.

Part Number


V-AFA2V/R2C-V535

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.


New advances in sensor cables allow for extended durability and longevity in the harshest environments.

Wiring





Diagram

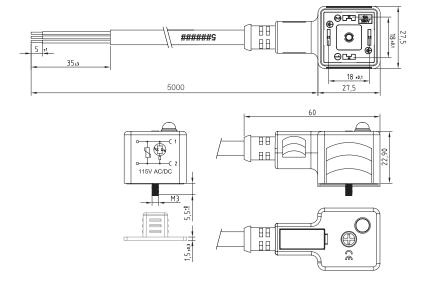

Technical Data

| Connector Type | Form A EN175301-803 |
|-----------------------|----------------------------|
| Cable Type | Single Ended |
| Connector A | - |
| Connector B | Female Angled |
| Contact Spacing | 18 mm |
| Number of Poles | 2 + 2PE |
| Earth Position | 12 & 6 |
| Jacket Type | PVC |
| Length | 5 m |
| Body Material | Polypropylene |
| Contact Carrier | PA66 |
| Circuit Type | Varistor + Bipolar Red LED |
| Gasket | NBR |
| Fixing Screw Size | M3x0.5 L28 mm |
| Fixing Screw Material | Fe/Zn |
| Rated Voltage | 115 V |
| Rated Current | 10A |
| Protection Class | IP67 |
| Temperature Rating | -20 °C to +80 °C |
| | |

