





Note: The product images shown may change over time as products are updated.

**Dimensions**

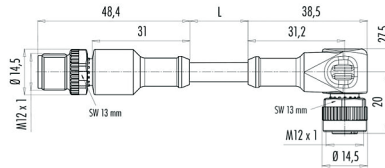


**Connection**

Male insert M12



Female insert M12



- 1 brown
- 2 white
- 3 blue
- 4 black

**Part Number**

R-MS4TZ-T662+R-FA4TZ-T662-S

**Features**

- High performance TPE cables for automotive applications
- 10 Million flex rating for long-lasting performance
- Anti-vibration nuts for reliable connection
- PTFE coated nuts for spatter resistance
- Single-ended, double-ended and splitter versions available
- Ideal for use in weld cells where cables can get damaged

**Cable Design**

**Technical Data**

Connector Type	M12
Cable Type	Double
Connector A	Male Straight
Connector B	Female Angled
Length (m)	2 m
Locking System	Screw
Rated Current	4 A
Rated Voltage	250 V
Wire Gauge	4 x 22 AWG
Stranding	19 x 34
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuSn (Bronze)
Contact Plating	Au (Gold)
Jacket Type	TPE-E with Silicone Sleeve
Coupling Nut	PTFE Brass
Protection Class	IP68
Temperature Range	-25 °C to +105 °C



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305  
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127  
 service@htmsensors.com