


- QUICK-CONNECT SENSOR CABLES FOR SENSOR CONNECTIONS
- LOW PRICES WITH THOUSANDS IN STOCK FOR SAME-DAY SHIPPING
- AVAILABLE IN LOW-COST PVC, OIL-RESISTANT PUR, AND SPATTER RESISTANT TPE
- AVAILABLE IN YELLOW, BLACK OR GREY OR CUSTOM COLORS
- AVAILABLE IN STANDARD 5 m LENGTH, OR ANY CUSTOM LENGTH
- ANY STYLE AVAILABLE WITH PRE-INSTALLED PROTECTIVE SILICONE JACKET

## QUICK-CONNECT SENSOR CABLES - M8 SPECIFICATIONS

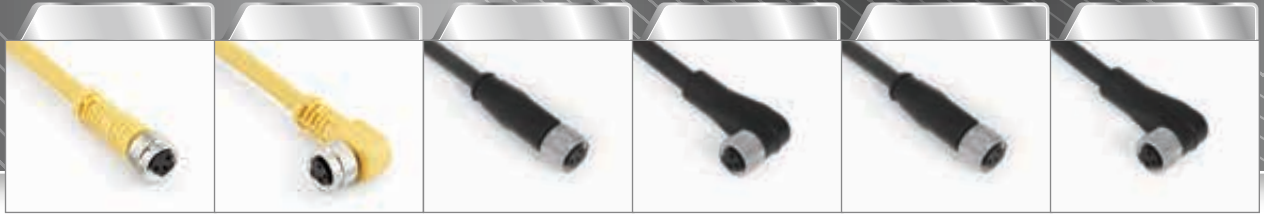

CONNECTION	M8 PVC		M8 PUR		M8 TPE	
CONNECTOR	Female Straight	Female Angled	Female Straight	Female Angled	Female Straight	Female Angled
CABLE MATERIAL	Low-Cost PVC		Oil-Resistant PUR		Weld Spatter Resistant TPE	
WIRE GAUGE	22 AWG					
THREADED CONNECTOR	Nickel-plated Brass					
NOMINAL VOLTAGE	250 VAC/300 VDC (10-30 VDC LED models)					
PROTECTION	IP67					
PART NUMBERS						
3-pin / 3-wire	C-FS3TZ-V075	C-FA3TZ-V075	C-FS3TZ-P665	C-FA3TZ-P665	C-FS3TZ-T665	C-FA3TZ-T665
3-pin / 3-wire - PNP LED		C-FA3TP-V075				C-FA3TP-T665
3-pin / 3-wire - NPN LED		C-FA3TN-V075				C-FA3TN-T665
4-pin / 4-wire	C-FS4TZ-V075	C-FA4TZ-V075	C-FS4TZ-P665	C-FA4TZ-P665	C-FS4TZ-T665	C-FA4TZ-T665
For Food Grade Stainless Steel Nuts	Add -SS on the end of the part #					
For Weld Grade PTFE Coated Nuts	Add -PTFE on the end of the part #					
For 18AWG wires	Add -18AWG on the end of the part #					
For Factory Pre-Installed Silicone Sleeve	Add - S on the end of the part #					
For custom lengths	Change "5" on the end of the part # to the desired length in meters					
For male connectors	Change "F" in the part # to "M"					
For custom colors	For PVC Cable, add - Black, -Grey, -Yellow, or -Orange to the end of the part #					

NOTE: Specifications subject to change without notification.

QUICK-CONNECT SENSOR CABLES HAVE A LOW PRICE,  
AND THOUSANDS IN STOCK FOR SAME DAY SHIPPING.

